


860-3-N

Flush Lite

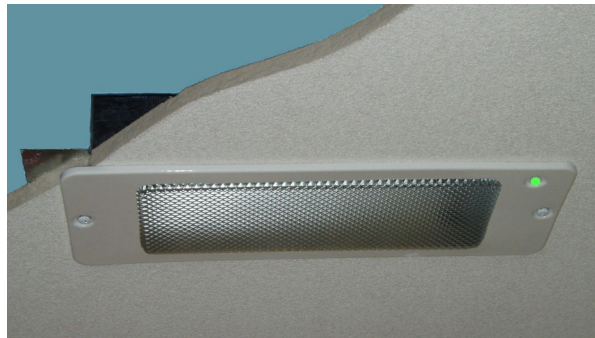

Product Description

Self-Testing Non Maintained Internal, 3 Hour Ceiling Recessed Fitting. White plastic faceplate with galvanised body fitted with a polycarbonate lens. Suitable for internal use only. Has all the advantages of a P4 *FASTEL* emergency unit. Maintenance is kept to a minimum with fully automatic self-testing and 6-year battery life.

Standard Features

Lamp Type:	1 x 8 Watt T5	Supply Voltage:	230V ac +/- 10%
Approval:	EN 60598	Protection Level:	IP 20
Hot Wire tested:	850°C EN 60598		
Charge Time:	24 hours to full duration, 48 hours to full capacity		
Self Test Programme:	See <i>FASTEL</i> Testing Schedule		
Dimensions:	380mm x 145mm x 85mm (cut out size 342mm x 125mm)		

Options

- M, High frequency ballast for maintained use
- 1, One hour duration
- Br, Brass Finish
- Ch, Chrome Finish
- Special Paint Finish any RAL standard colour
- SM, Self Monitoring (*FASTEL* watch)
- SRM, Computer Addressable (*FASTELink*)



©2005 P4 Limited. All rights reserved.
 Details correct at time of publication. P4 reserve the right to change specifications at any time.

